

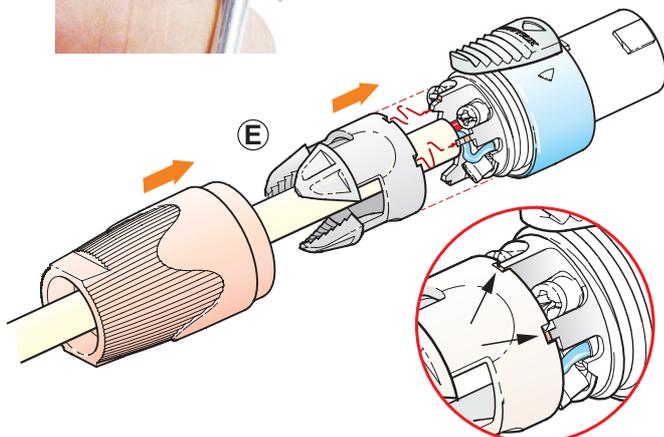
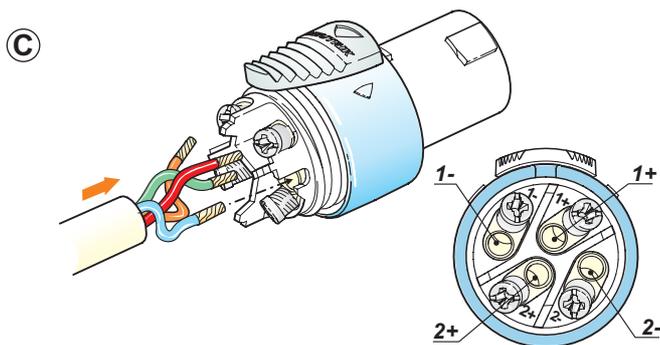


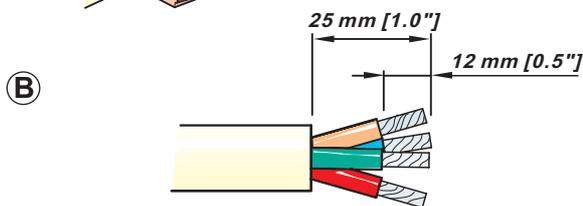

# ASSEMBLY INSTRUCTION

## NL4FX / NL4FRX

### Speakon® SPX Series | Lockable Loudspeaker Connector

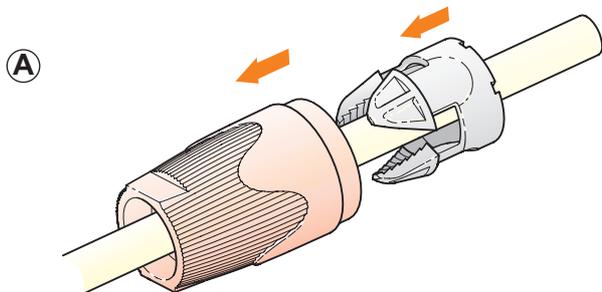

#### Assembly of the Connector:

**A** Place bushing and chuck over cable.

**B** Prepare cable as shown.

*Important is the stripping length of 25 mm and 12 mm.*

**C** Insert wires into terminals and secure clamp terminals with screw driver (Pozidrive®).

**D** For easy wiring especially on big cables, first screw on the inner contacts 1+ and 2+ and afterwards the outer contacts 1- and 2- !

**E** Push chuck up to housing .

**Important:** Align the chuck by positioning the nose into the recess.

**F** Tighten the bushing


#### INFO to the screw driver:








**DO NOT USE!**

Pozidrive #1

Philips

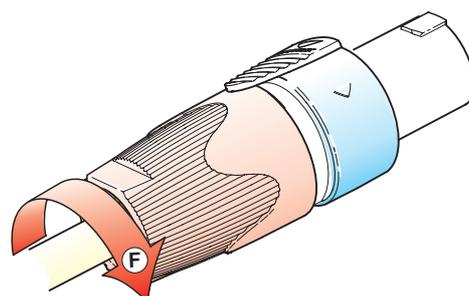


## Assembly of the Conversion Kit:

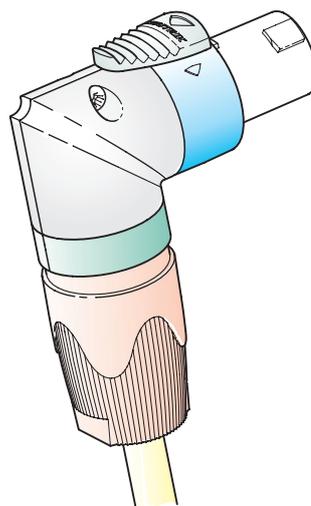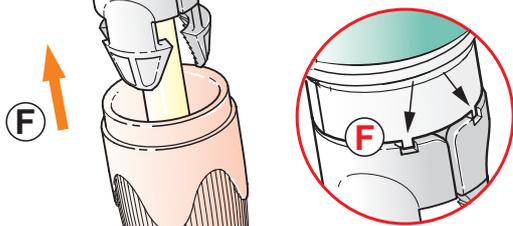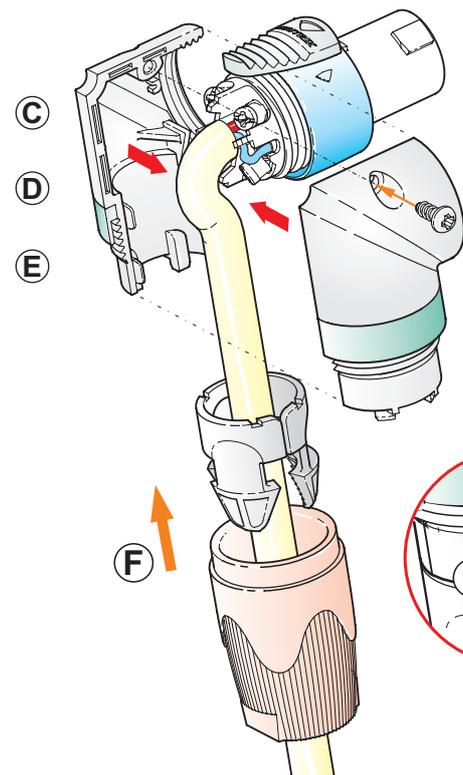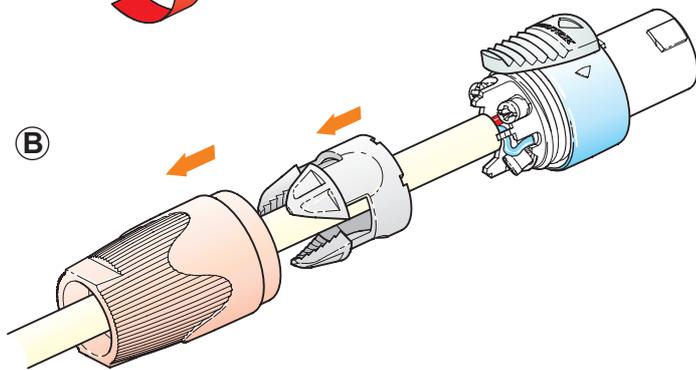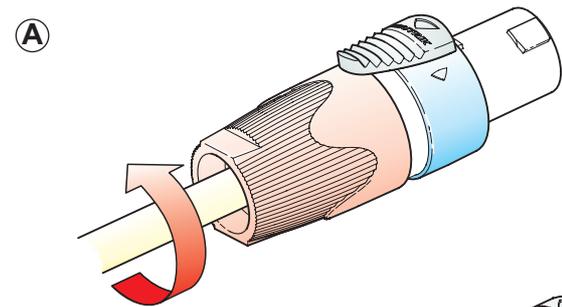


- A** Open the bushing.
- B** Slide the bushing and the chuck back.
- C** Bend the cable as shown.
- D** Position the two conversion shells to fit on the connector thread.
- E** Press together and fix by screw.
- F** Slide the chuck onto the housing and fasten the bushing.  
**Important:** Align the chuck by positioning the nose into the recess.

### Handling:

Engagement:

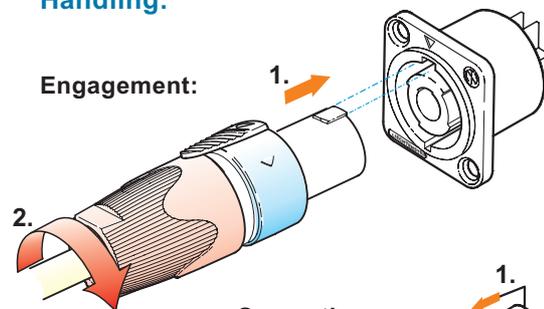

Separation:

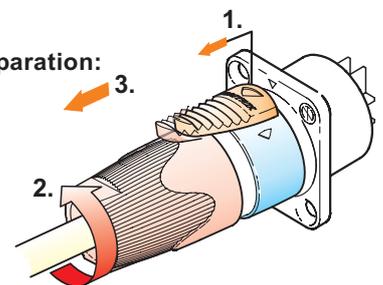

NEUTRIK AG LI T: +423 / 237 24 24 F: +423 / 232 53 93  
 NEUTRIK Zürich AG CH T: +41 44 / 736 5010 F: +41 44 / 736 5011  
 NEUTRIK USA Inc. USA T: +1 732 / 901 9488 F: +1 732 / 901 9608  
 NEUTRIK (UK) Ltd. UK T: +44 1983 / 811 441 F: +44 1983 / 811 439

NEUTRIK Vertriebs GmbH DE/NL/AT T: +49 8131 / 280 890 F: +49 8131 / 280 830  
 NEUTRIK France FR T: +33 1 / 4131 6750 F: +33 1 / 4131 0511  
 NEUTRIK Tokyo Ltd. JP T: +81 3 / 3663 4733 F: +81 3 / 3663 4796  
 NEUTRIK Hong Kong Ltd. HK T: +852 / 2687 6055 F: +852 / 2687 6052

Draft. Nr.: BDA 114 / 3102M1171 | Update: 12..03.2008 | Data subject to change without prior notice. ©2008NEUTRIK®. ALL RIGHTS RESERVED.

[www.neutrik.com](http://www.neutrik.com)

**NEUTRIK**