



Touring bumper for GeoM10 / MSUB15

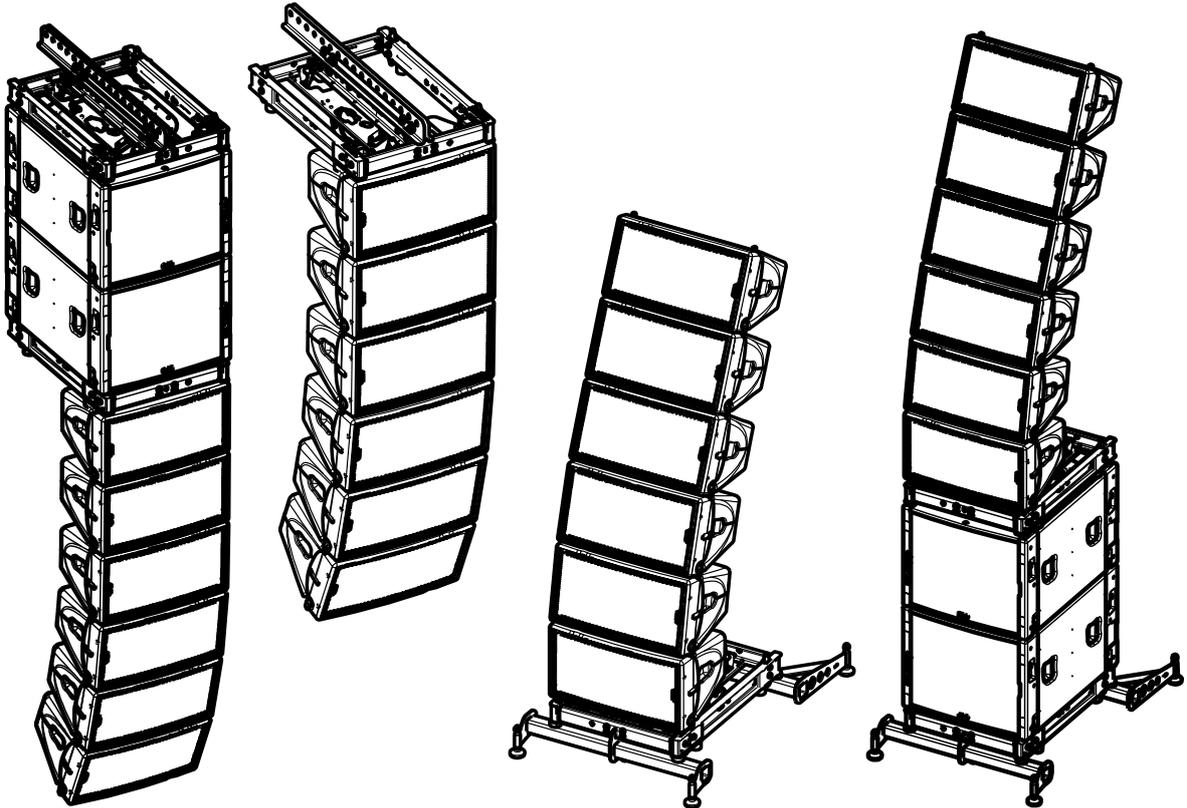


Contents:

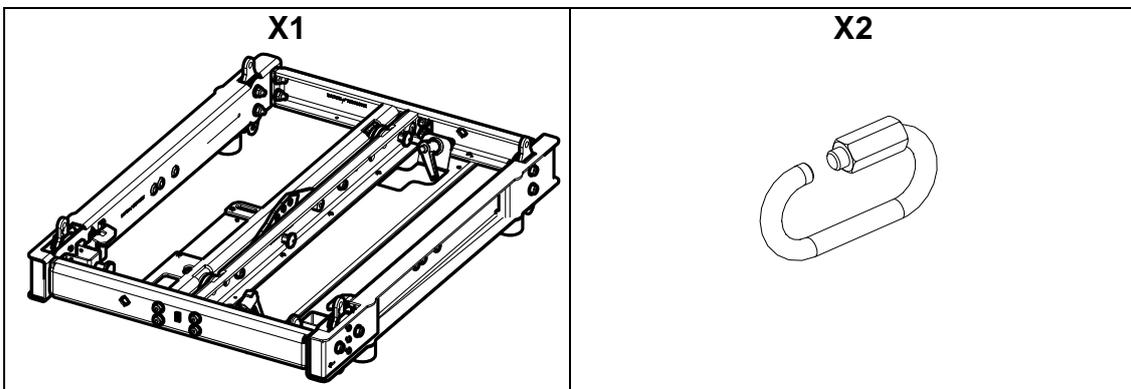


Weight: 20 kg / 44 lb

Dimensions:

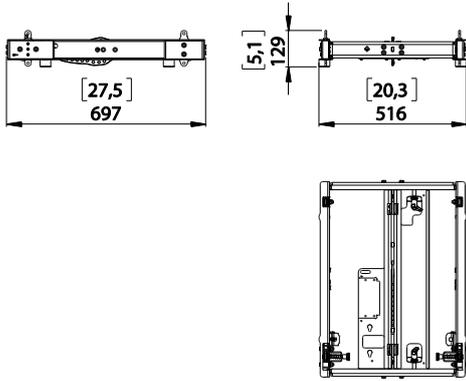


Features:

Additional details about the individual functions can be found below:

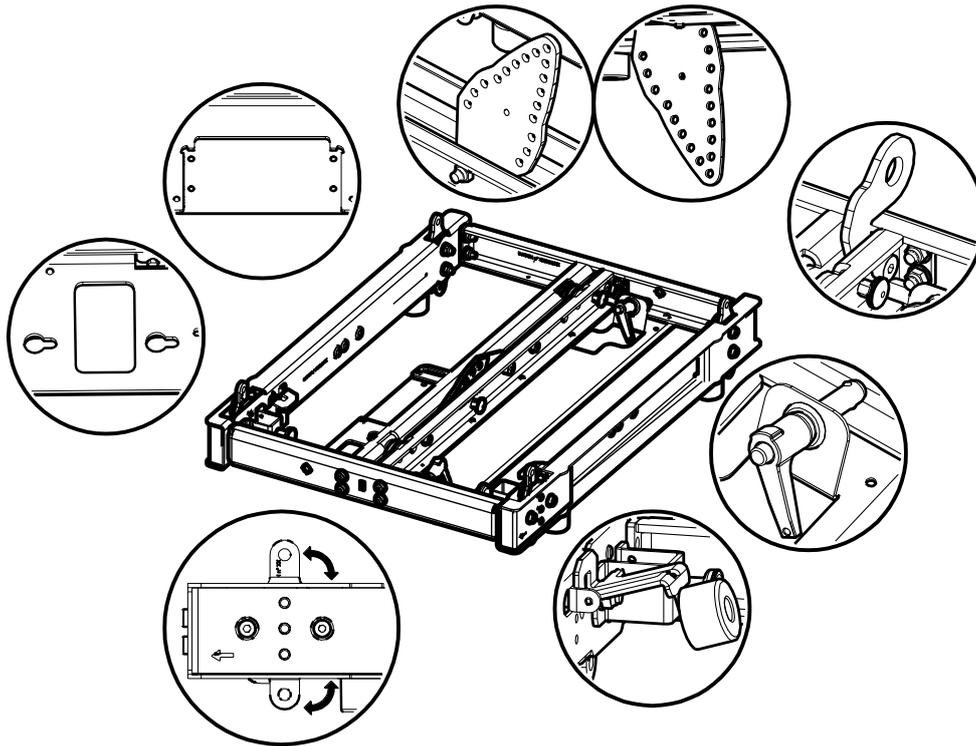

- **Retractable skids**

Front skids are retractable to allow the adjustment of certain angles with the first GEO M10.

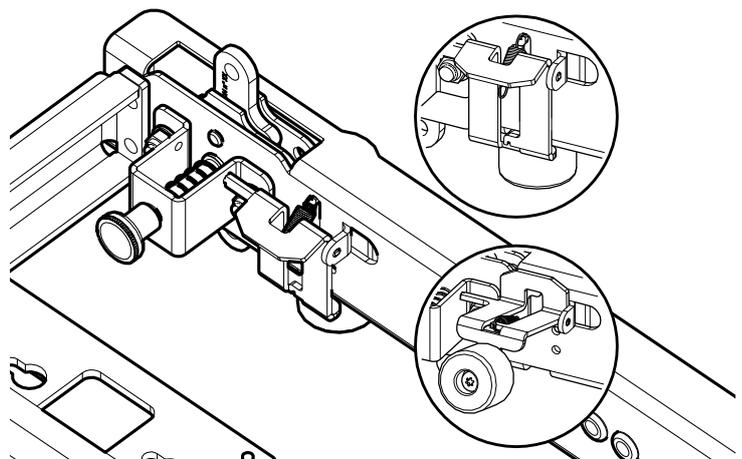

NEXO

www.nexo-sa.com

ZA du pre de la Dame Jeanne


60128 PLAILLY-France

- Read this document before using.
- Keep this document.
- Observe all warnings and cautions.



- **Front rigging point**

Front rigging points are easily configurable, it is enough to pull the bolt to free the rotation of the link, and to release to lock.

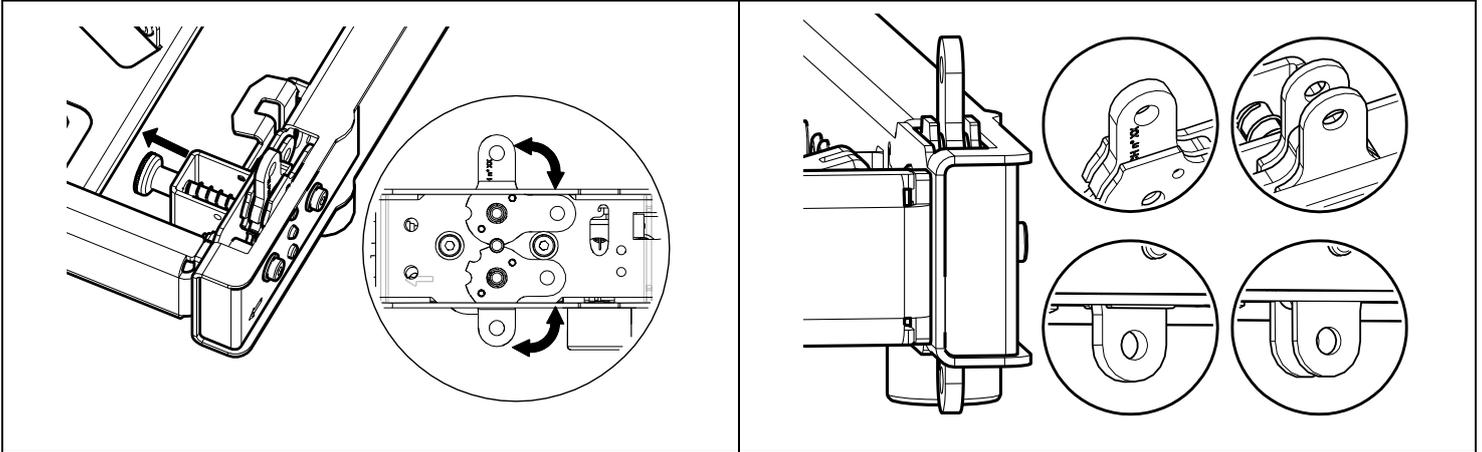


- **Lift rings**

On the front and the rear of the Frame, you find a lift ring.

Pull the bolt to unlock the ring.


Insert a quick link in the ring to lift.

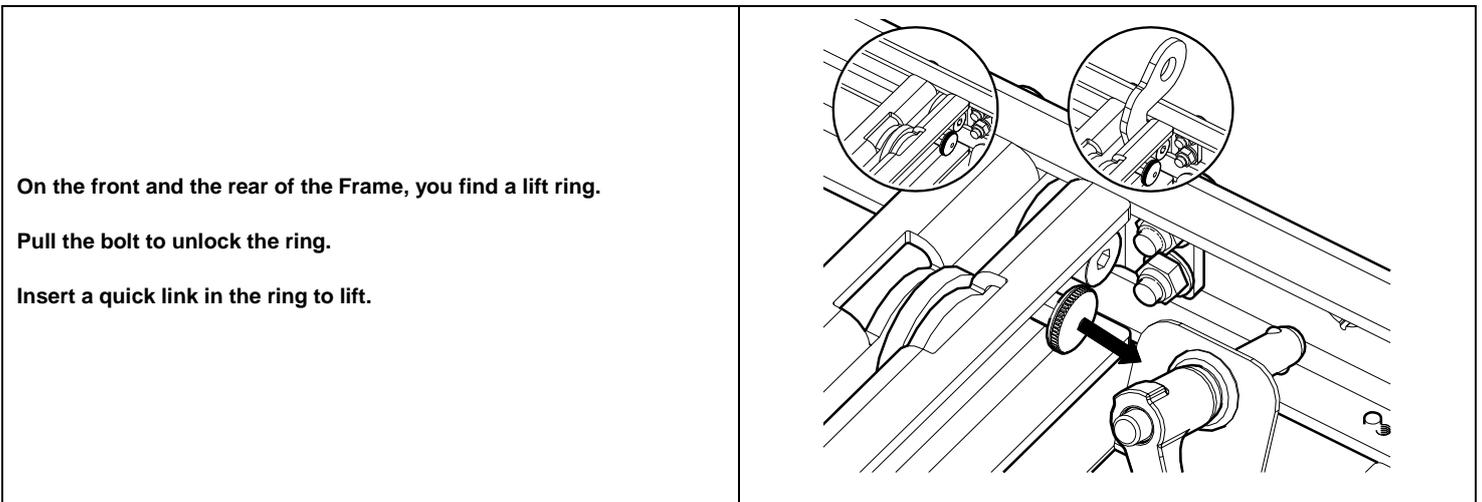

- **BL 12x40 Storage**

On the front and the rear of the Frame, you find a place to store quick release pin (12x40).

These quick release pins are used to lock VNT-EXBARM10 or VNT-GSTK (L/S).

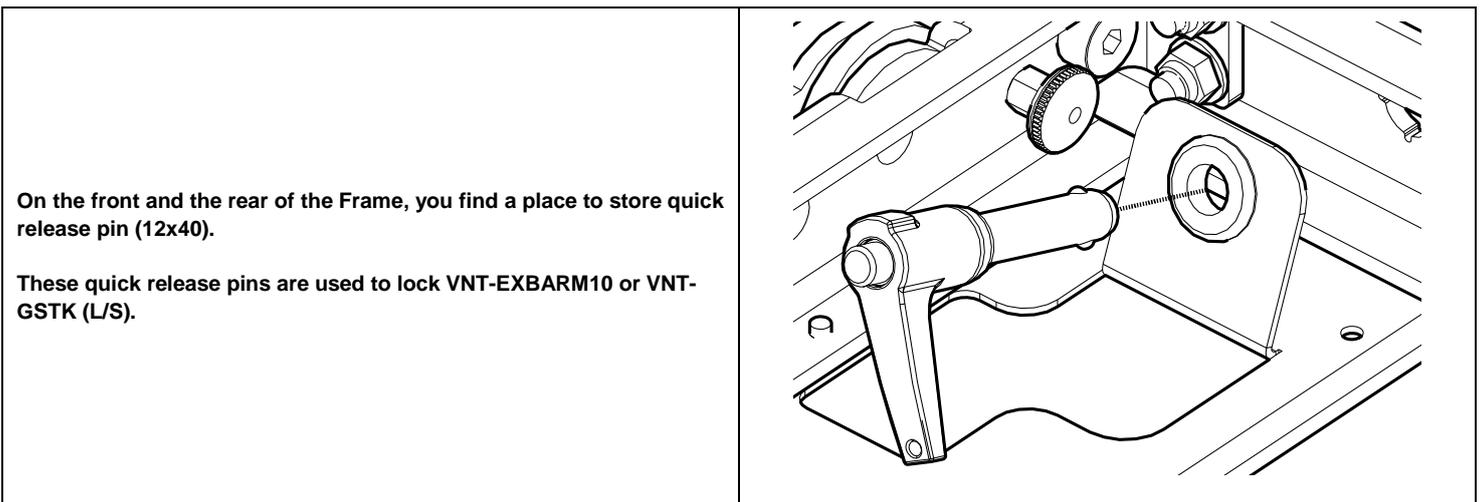


www.nexo-sa.com
 ZA du pre de la Dame Jeanne
 60128 PLAILLY-France

- Read this document before using.
- Keep this document.
- Observe all warnings and cautions.





- Laser / Clinometer

2 locations are available for laser/clinometer, VXT-LIKM or RECLINE.

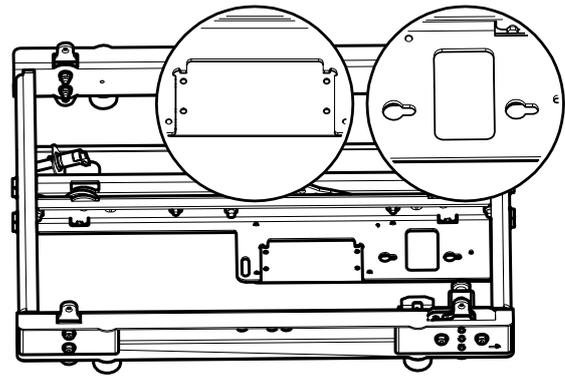

- LinkBar

Pull the bolt to unlock the LinkBar, use for stack or flow with the first GEOM10.

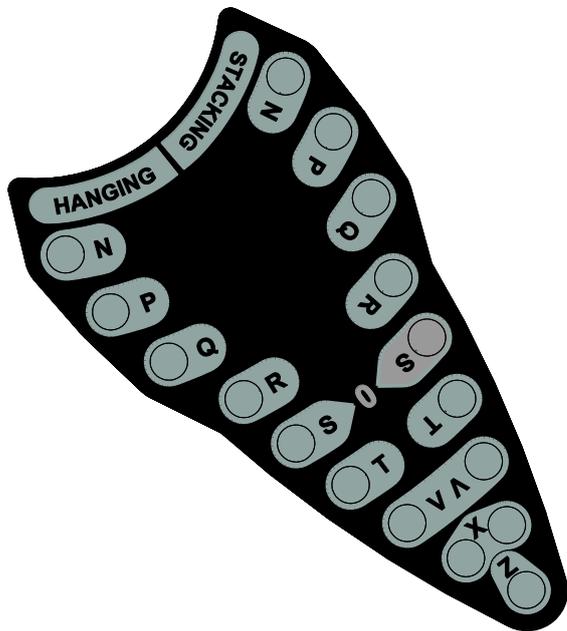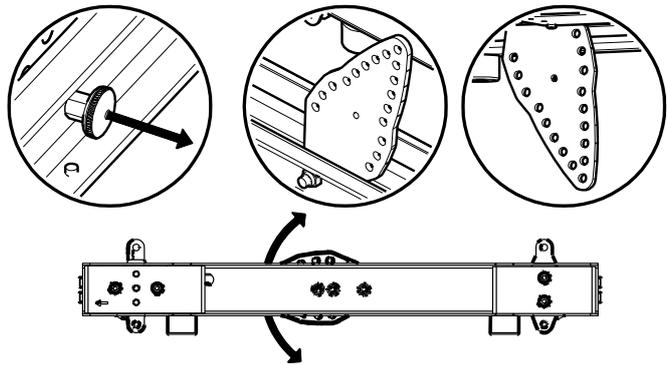

HANGING		STACKING
Z	+12°	N
X	+9°	P
V	+6°	Q
T	+3°	R
S	0°	S
R	-3°	T
Q	-6°	V
P	-9°	X
N	-12°	Z

WARNING: Use NEXO Simulation Software for mechanical prediction

- NEXO cannot accept responsibility for accidents caused by any factor other than defects in this product itself.
- Please check the web site nexo-sa.com for the latest update.



www.nexo-sa.com
 ZA du pre de la Dame Jeanne
 60128 PLAILLY-France

- Read this document before using.
- Keep this document.
- Observe all warnings and cautions.

