

ZONE4R

ZONE4 wall control panel for music level & source select



ZONE4R is a remote control panel for the ZONE4, Apart's multifunctional 4-zone pre-amplifier. The control panel offers music level control, source selection and microphone mix level control. A clear digital display makes it easy to monitor the functioning of the unit.

The remote panels are easy to install, and are connected to the ZONE4 by a standard CAT-5 cable (or higher). Both T-568A and T-568B cable terminations can be used. The maximum approved CAT5 cable length is 100m per zone, according to circumstances. Mounting screws are included. A build-in box (BBi1) and surface mounted back box (BB1) is available.

The maximum ZONE4R control panels connected to a single ZONE 4 pre-amplifier is 8 pieces in any configuration (e.g. 2 panels x 4 zones or 8 panels x 1 zone or any other combination with a total of 8 panels). You can connect multiple ZONE4R units to the ZONE4 main unit using the RJ45 split hub.

Each controller has its unique network address. Please note that the ZONE4R panels are unique to the Apart ZONE4 four-zone pre amplifier and can't be used for controlling another pre-amplifier. ZONE4R cannot be linked to a PC and is not network compatible!

Addressing the control to a zone is very easy: by pushing the music volume and microphone volume buttons for 5 seconds, a zone indication will appear on the display. Use the source selection buttons to assign the remote control to the zone you want. After 5 seconds, the remote control can be operated.

Sophisticated but yet affordable: this remote control has all basic controls, is easy to install and easy to use. The combination with the ZONE4 pre-amplifier gives you the competitive edge to tackle even the most daunting challenges!

TECHNICAL SPECIFICATIONS

display	2 digit LED	display backlight	No
supported main unit	ZONE4	programmable functions	No
addressing	Software	connector type	euroblock 4-pole
max. cable in mm ²	2.5	max. cable length in m	100
power type	Phantom	inputs	No
cut-out dimensions in mm	70 x 55	width in mm	114
height in mm	80	depth in mm	40
Net weight product in kg	0.14		

MORE PICTURES




ACCESSORIES



RJ45SPLIT

RJ45 Splitter : 1input, 4 output (MICPAT-4 or ZONE4R)

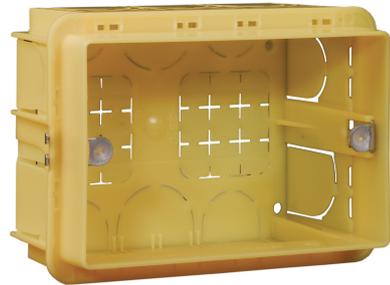

BBI1

Universal BTicino built-in box 3 modules



BB1

Build on box for remote panel PM1122R and ZONE4R, white