

eGPA8-150

LOW IMPEDANCE

Multichannel Amplifier



PRODUCT OVERVIEW

ECLER ESSENTIALS eGPA8-150 is an 8x150 W RMS @ 4 Ω, high efficiency multichannel amplifier (class D). Auto stand-by function and fanless design, 100% silent. Thermal and overload protections. Anti-clip system.

KEY FEATURES

- 8 analogue audio inputs x 8 powered audio outputs
- Euroblock input and output connectors
- High efficiency, auto standby function and convection cooling (fanless, 100% silent)
- BRIDGE mode ready
- Thermal protection
- Overload protection
- Anti-clip system


APPLICATIONS

- Clubs
- Theme restaurants
- Discos
- Leisure centres
- Cinemas and theatre
- Educational centres
- Boardrooms and conference halls
- Sports centres
- Mobile outdoor applications

CERTIFICATIONS

- EN60065:2014
- EN55103-1:2009
- EN55103-2:2009
- 2006/95/EC
- 2004/108/CE

MECHANICAL DIAGRAMS

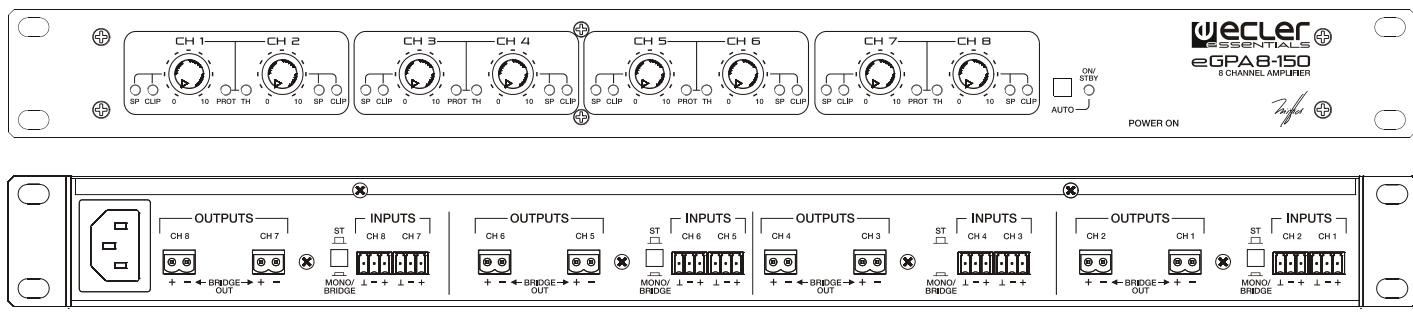

TECHNICAL DATA

POWER 20-20kHz 1% THD	
1 Channel @ 4Ω	148 WRMS
1 Channel @ 8Ω	74 WRMS
All Channels @ 4Ω	144 WRMS
2 Bridged Channels @ 8Ω	290 WRMS
Frequency response (-1 dB, -3dB)	20Hz - 25kHz
Filter (High-Pass) 3rd order Butterworth	15Hz
THD+Noise @ 1kHz Full Power	<0.05%
S+N/N 20Hz - 20kHz @ 1W/4Ω	>85dB
CMRR	>55dB
Damping factor 1kHz @ 8Ω	>150
Channel crosstalk @ 1kHz	>55dB
Input Sensitivity / Impedance	0dB/20kΩ
Anticlip @ 2dBV input	<1% THD
Mains voltage	See characteristics in the back of the unit.
Power consumption	
pink noise, 1/8 power @ 4Ω	226W / 260VA
pink noise, 1/3 power @ 4Ω	536W
Idle	58W
STBY	36W
Efficiency @ Pmax	80%
Dimensions (Handle excluded)	440x44x341mm
Weight	6.50kg