




GE
Lighting

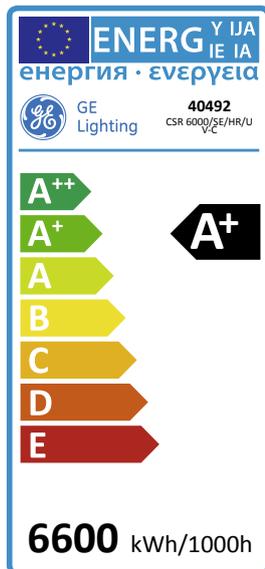

6600
kWh/1000h

A+
energy class

90
lumens/watt

Discharge - Single Ended Hot Restrike

CSR 6000/SE/HR/UV-C

40492

Product information

Compact, single ended metal halide hot restrike lamps for a variety of applications requiring high luminance, reliability and excellent colour characteristics. Excellent colour rendering, Ra>90, and high CCT 5600–6000 K with superior colour stability- Universal burn position with hot restrike capability- High efficiency with excellent lumen maintenance -Available with UV blocking.

Application areas

Film and Broadcast



Product data

Cap/Base	G38
Bulb Shape	Globe
Bulb Finish	Clear
Bulb Diameter [mm]	85
Maximum Overall Length [mm]	360
Light Center Length [mm]	210
Arc Gap	26
Net weight per piece [g]	1730
Gross weight per piece [g]	1947
Operating position	U - Universal
Brand	General Electric (GE)

Performance data

Colour Code	956
Colour Rendering Index (CRI) [Ra]	90
Nominal correlated colour temperature (CCT) [K]	5600
Nominal lumens [lm]	540000
Energy efficiency class (EEC)	A+
Nominal chromaticity coordinate X	0.333
Nominal chromaticity coordinate Y	0.333
Weighted energy consumption [kWh/1000h]	6600

Electrical data

Nominal power [W]	6000
Nominal lamp voltage [V]	130
Lamp Current [A]	46
Dimming Capability	No
Ballast Required	Yes

Logistic data

DUN Code	10043168404928
EAN Code	0043168404921
Pack Quantity	6
Inner pack type	BOX
Outer pack type	OUTER BOX
Layer quantity	12 EUR, 24 UK
Layer quantity EUR	12
Layer quantity UK	24
Pallet quantity UK (PC)	24
Outer case size	760 x 510 x 545 (mm)
Product status	Available

Downloads & Links

[Go to the catalog site \(HTTP\)](#)

[Entertainment Solution Spectrum Catalogue \(PDF\)](#)

[Lighting design tools & calculators \(HTTP\)](#)

[High-res images / Technical drawings \(HTTP\)](#)

[Certificate for the Quality Management System of GE Lighting EMEA \(PDF\)](#)

[Certificate for the Environmental Management System of GE Lighting EMEA \(PDF\)](#)

Disclaimer

Special Purpose Lamp, Not suited for household illumination