
269 LEE Heat Shield

View on leefilters.com / Find a Dealer

A transparent flexible film used to extend the life of filter. The shield should be placed between the light source and the filter, allowing distance between the shield and the filter.

	6774K	3200K
Transmission Y	91%	-
Х	0.311	-
У	0.317	-
Absorption	0.04	-

Light transmitted (Y%) for each colour wavelength (nm)

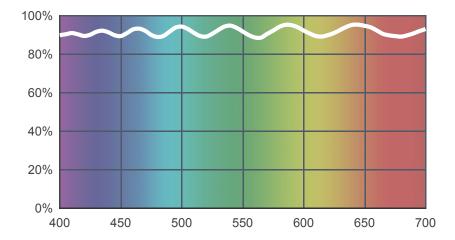

Dimming Source Preview

100% Power 3200K	50% Power 2700K	30% Power 2000K

Rolls:

- 1" Core 7.62m x 1.22m (25' x 48")
- 2" Core 7.62m x 1.22m (25' x 48")
- Quick Roll Length 7.62m (25') x any width between 2.5cm - 1.17m (1" x 48")

Sheets:

- Full Sheet 1.22m x 0.53m (48" x 21")
 USA: Full Sheets by special order only.
- Half Sheet 0.61m x 0.53m (24" x 21")

Pre-Cut Packs:

· Not available in a pack

