

CM3T

3" dual cone loudspeaker, white



The CM3T is a stylish small built-in 70 / 100 Volt loudspeaker. Thanks to its halogen-spot size, it can be integrated into any interior style. It is ideal for speech and backgroundmusic in quiet areas, toilets, cloakrooms,....

The speaker has a full metal frame and a coated dual paper cone for the lowest distortion and increased resistance against moisture.

The CM3T is easy to install thanks to its simple, quick mounting system (2 spring clamps).

The versatile CM3T ceiling mount speaker now comes with the addition of the 70 / 100 volt connection, an elegant and stylish Apart removable logo and a redesigned tapping sticker for easy install.

The CM3T loudspeakers can be painted in any colour.


TECHNICAL SPECIFICATIONS

| | | | |
|--------------------------------------|--------------------|--|----------------------------|
| outside diameter in mm | 105 | depth in mm | 74 |
| cutout in mm | 85 | installation grip range in mm | 1 - 15 |
| loudspeaker system | dual cone | woofer size in inch | 3 |
| woofer cone material | coated paper | mounting system | 2 springs |
| colour | white / black | 100V transformer power taps in watts | 6 - 3 - 1.5 |
| 70V transformer power taps in watts | 6 - 3 - 1.5 - 0.75 | impedance in ohms | 16 |
| low impedance dynamic power in watts | 20 | low impedance RMS power in watts | 10 |
| SPL 1W/1m in dB | 87 | max SPL 1m in dB | 99 |
| frequency response in Hz | 120 - 18K | main construction material | steel |
| grille main material | aluminium | IP rating | |
| applicable low impedance | yes | applicable in 100V | yes |
| Vertical dispersion angle 1000 Hz | 180° | closest RAL colour (subject to deviations) | RAL9010 (W) / RAL9011 (BL) |
| Net weight product in kg | 0.35 | | |

POLAR PLOTS


Data Shown: CM3T (Apart Audio)
 Display Parameters: Frequency: 1000Hz (1/24th Octave)

Horizontal
 Vertical

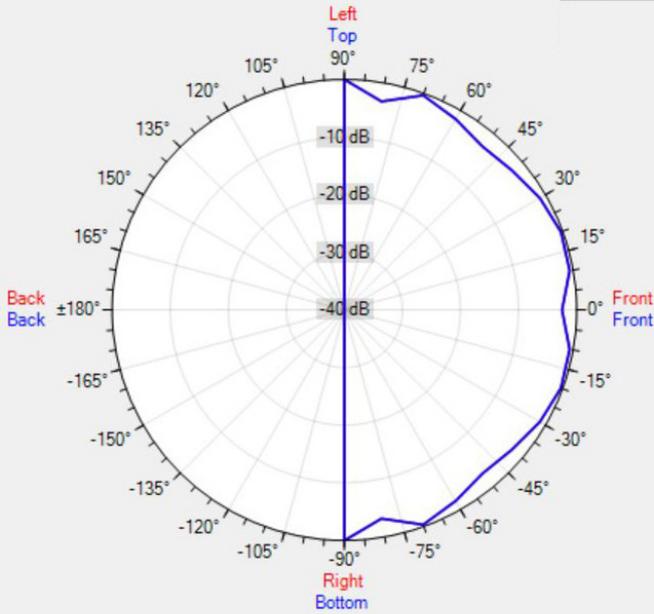


Data Shown: CM3T (Apart Audio)
 Display Parameters: Frequency: 2000Hz (1/24th Octave)

Horizontal
 Vertical

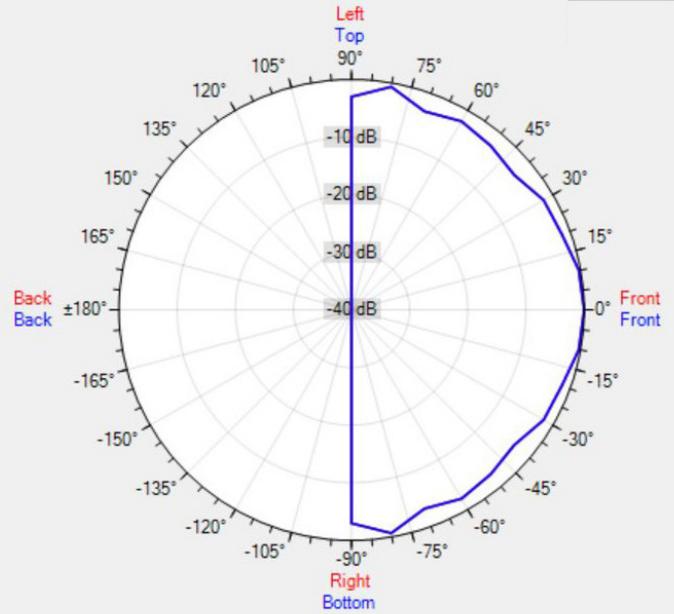


Data Shown: CM3T (Apart Audio)
 Display Parameters: Frequency: 4000Hz (1/24th Octave)

Horizontal
 Vertical

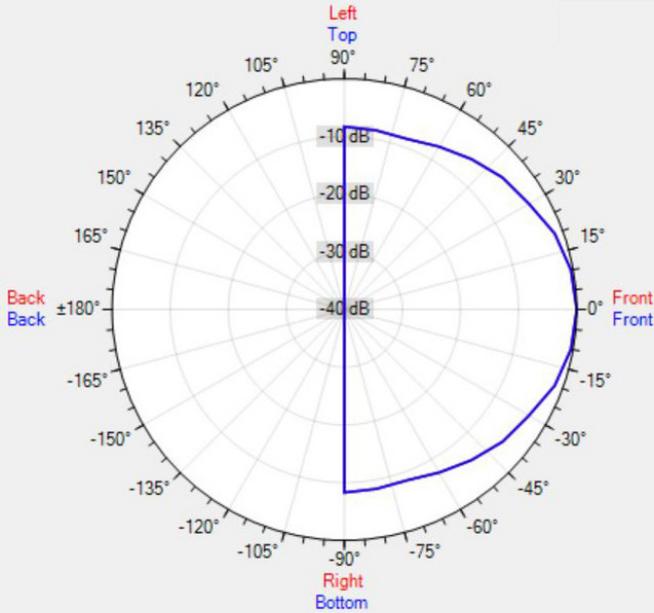

Data Shown: CM3T (Apart Audio)
 Display Parameters: Frequency: 8000Hz (1/24th Octave)

Horizontal
 Vertical

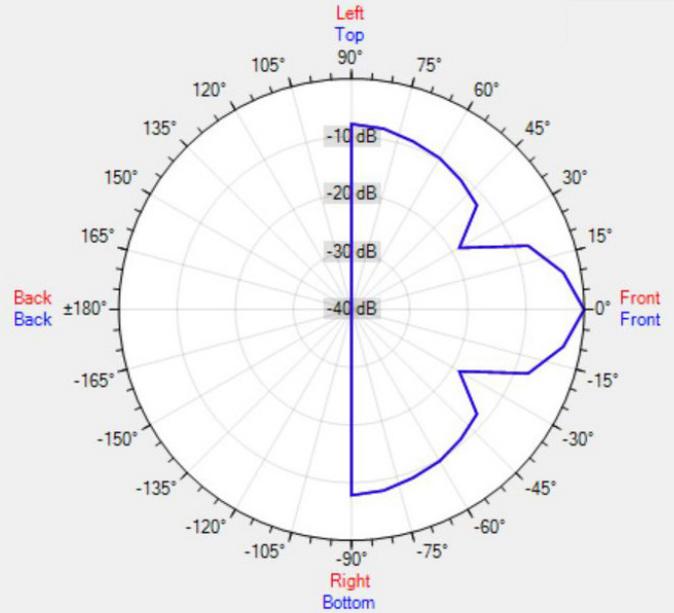

[MORE PICTURES](#)



| | | | |
|--------------|------|---|---|
| APart | | CM3T |  |
| GREEN | 1.5W |  | Max. 20Watts music power 16 OHM |
| WHITE | 3W | | |
| RED | 6W | | |
| BLACK | COM | | |
| | | |  |
| | | |  |